


Отводы крутоизогнутые ОСТ24.125.34-89

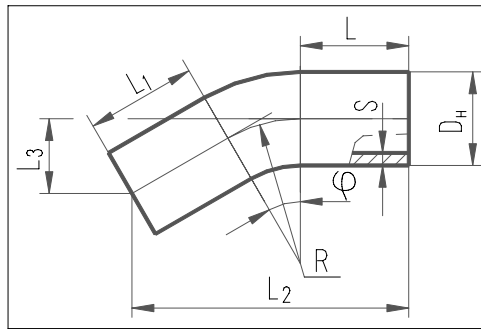

Для изготовления отводов применяются трубы из стали 20 по ТУ 14-3Р-55-2001 для исп. 01÷10, 16÷40, 46÷55, 61÷105, 15ГС по ТУ 14-3Р-55-2001 для исп. 11÷15, 41÷45 и 16ГС по ТУ 3-923-75 для исп. 56÷60, 106÷115.

Исполнение	Условный проход D _y , мм	Размеры присоедин. труб D _н x S	Радиус R	Угол гiba φ	Прим.
p=11.77 МПа (120 кгс/см ²), t=250°C;					
01 ОСТ 24.125.34-89	80	86x9	200	15°	
02				30°	
03				45°	
04				60°	
05				90°	
06	100	108x8	250	15°	
07				30°	
08				45°	
09				60°	
10				90°	
p=11.77 МПа (120 кгс/см ²), t=250°C; p=8.44 МПа (86 кгс/см ²), t=300°C;					
11	125	133x8	300	15°	
12				30°	
13				45°	
14				60°	
15				90°	
16	150	159x9	350	15°	
17				30°	
18				45°	
19				60°	
20				90°	
21	200	219x13	375	15°	
22				30°	
23				45°	
24				60°	
25				90°	
26	250	273x16	375	15°	
27				30°	
28				45°	
29				60°	
30				90°	
31	300	325x19	450	15°	
32				30°	
33				45°	
34				60°	
35				90°	

36	400	426x24	600	15°	
37				30°	
38				45°	
39				60°	
40				90°	
41	500	530x28	800	15°	
42				30°	
43				45°	
44				60°	
45				90°	
p=8.44 МПа (86 кгс/см ²), t=300°C;					
46	80	89x6	200	15°	
47				30°	
48				45°	
49				60°	
50				90°	
51	100	108x6	250	15°	
52				30°	
53				45°	
54				60°	
55				90°	
56	600	630x25	1200	15°	
57				30°	
58				45°	
59				60°	
60				90°	
p=5.89 МПа (60 кгс/см ²), t=275°C; p=3.92 МПа (40 кгс/см ²), t=200°C;					
61	100	108x6	250	15°	
62				30°	
63				45°	
64				60°	
65				90°	
66	125	133x6.5	300	15°	
67				30°	
68				45°	
69				60°	
70				90°	
71	150	159x7	350	15°	
72				30°	
73				45°	
74				60°	
75				90°	
76	200	219x9	400	15°	
77				30°	
78				45°	
79				60°	
80				90°	
81	250	273x10	375	15°	
82				30°	
83				45°	
84				60°	
85				90°	

86	300	325x13	450	15°	
87				30°	
88				45°	
89				60°	
90				90°	
91	350	377x13	525	15°	
92				30°	
93				45°	
94				60°	
95				90°	
96	400	426x14	600	15°	
97				30°	
98				45°	
99				60°	
100				90°	
101	450	465x16	650	15°	
102				30°	
103				45°	
104				60°	
105				90°	
p=3.92 МПа (40 кгс/см ²), t=200°С.					
106	600	630x17	850	15°	
107				30°	
108				45°	
109				60°	
110				90°	
111	700	720x22	1200	15°	
112				30°	
113				45°	
114				60°	
115				90°	